



Richard C. Chu et al. POU920010085US1/ AJW 1 / 8


remai remai servai servai servai servai menai menai menai servai servai servai servai servai servai servai ser Reference servai se

WLA \12U280010059U09 8 \ 2

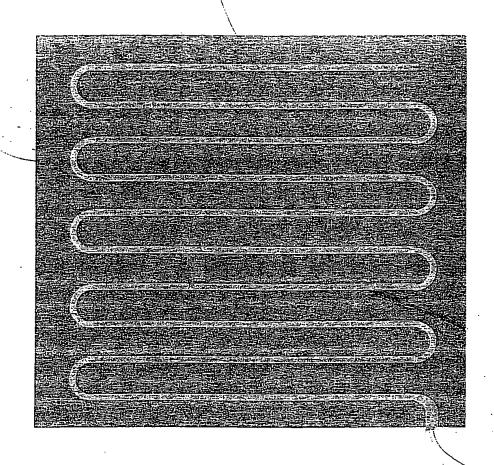


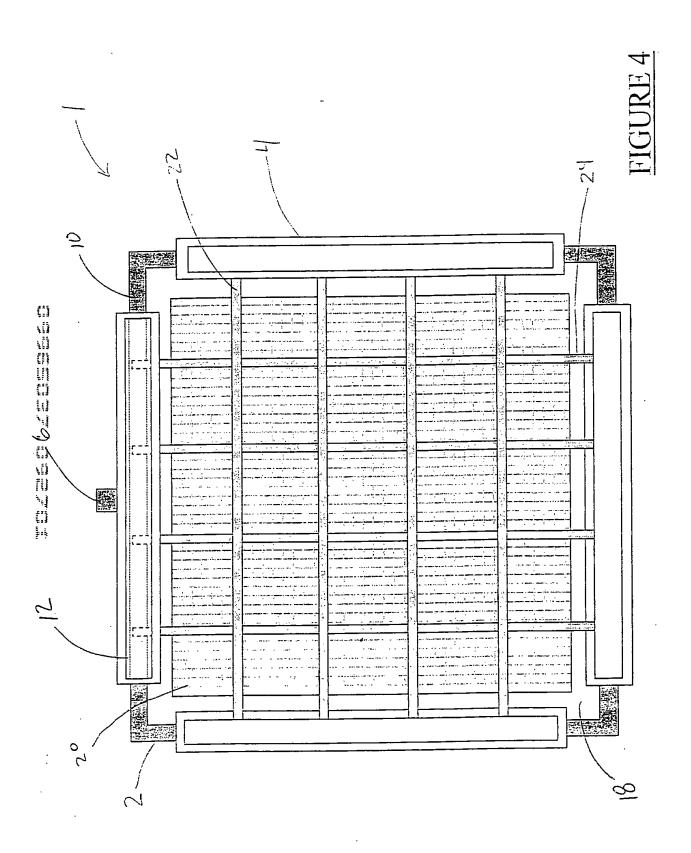



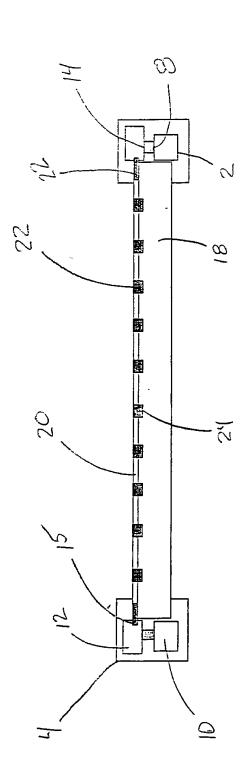

And the state of t

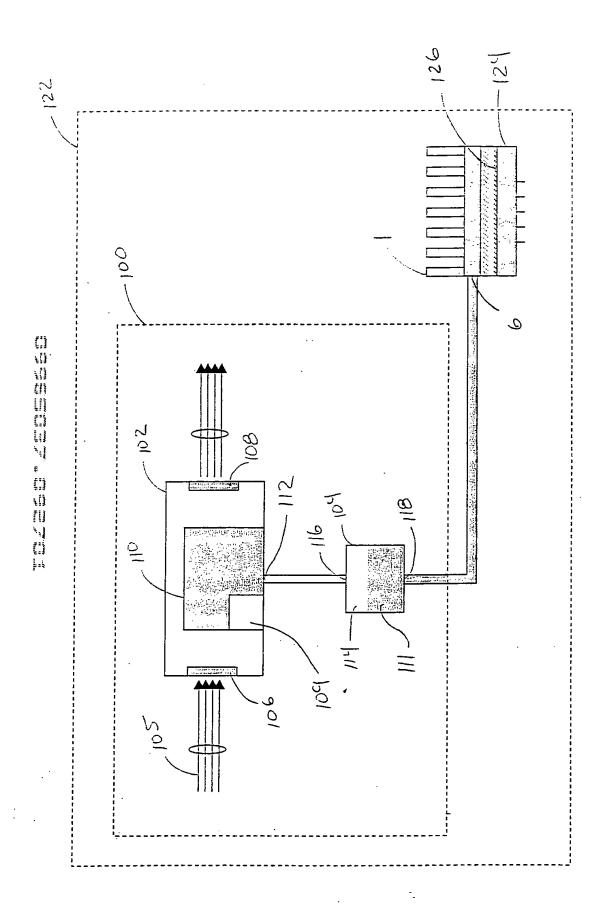

WUA\120010085US1\AJ 8 \ 8

WLA \iSU280010026U09 8 \ 7

Obtaining:

200

Communicating the coolant inlet with the storage outlet

to the electronic device so as to communicate Attaching the transpiration cooled heat sink

, o2.

the transpiration cooled heat sink with the

device outer surface;

8027

902.

POU920010085US1 \ AJW 8 \ 83